


PL-St



Stinger PL-St

Is used for cementing casing strings of large diameters through working drill pipes. It saves time on these works by reducing the volume of pumping fluid and increases the technological safety of works.

A separate drill pipe plug is supplied with the Stinger PL-St.

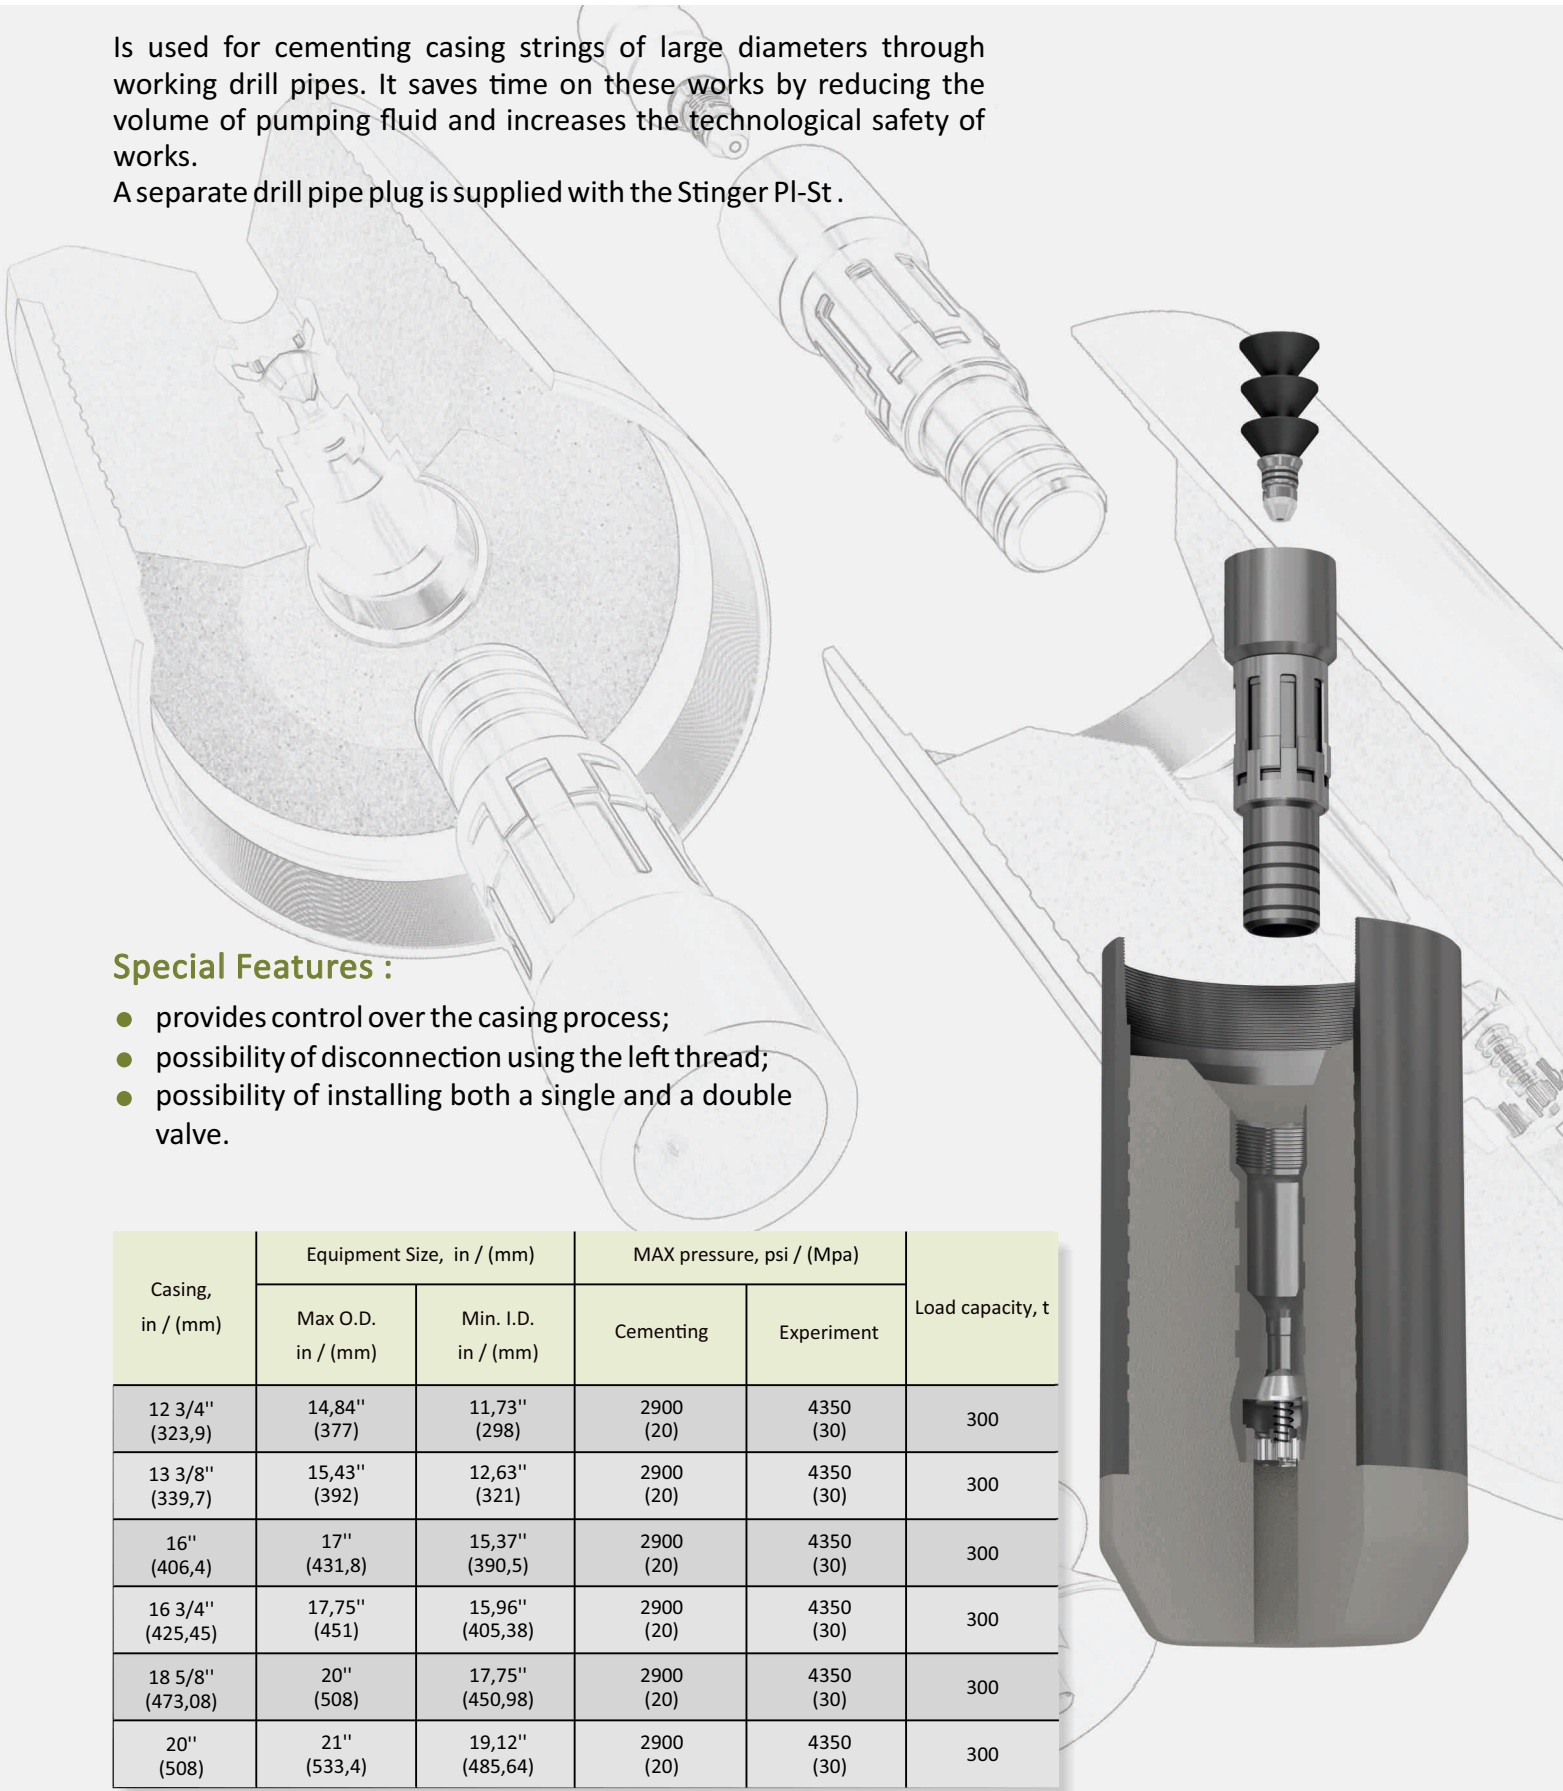

Special Features :

- provides control over the casing process;
- possibility of disconnection using the left thread;
- possibility of installing both a single and a double valve.

Casing, in / (mm)	Equipment Size, in / (mm)		MAX pressure, psi / (Mpa)		Load capacity, t
	Max O.D. in / (mm)	Min. I.D. in / (mm)	Cementing	Experiment	
12 3/4" (323,9)	14,84" (377)	11,73" (298)	2900 (20)	4350 (30)	300
13 3/8" (339,7)	15,43" (392)	12,63" (321)	2900 (20)	4350 (30)	300
16" (406,4)	17" (431,8)	15,37" (390,5)	2900 (20)	4350 (30)	300
16 3/4" (425,45)	17,75" (451)	15,96" (405,38)	2900 (20)	4350 (30)	300
18 5/8" (473,08)	20" (508)	17,75" (450,98)	2900 (20)	4350 (30)	300
20" (508)	21" (533,4)	19,12" (485,64)	2900 (20)	4350 (30)	300